

Double Sphere Rubber Expansion joint

FIG. 8102

Specifications

- With multi - sphere structure so that the vibration absorption is better and noise reduction efficiency is significant.
- High working pressure, anti-burst and good elasticity.
- To avoid damage caused by stretching, compressing, deflecting or displacing of pipes.
- Carbon steel flanges, Zn plated to BS4504 PN16 (Other flanges available).
- EPDM rubber suitable for hot water, steam, oxidant, animal and vegetable oils. Excellent resistance to sunlight. Good for high and low temperature applications.
- NBR is suitable for most hydrocarbons, oils, petroleum fuels and hydraulic fluids. Not good for sunlight ageing, ozone and flame.
- Neoprene suitable for water, sewage, oxidant and non-aromatic hydrocarbons.

Working Pressure

- Size DN32 to DN300:
- Working pressure 16 bar.
- Bursting pressure 48bar.
- Vacuum rating 500mmHg.
- Size DN350 to DN600:
- Working pressure 10 bar.
- Bursting pressure 30 bar.
- Vacuum rating 400mmHg.


Working Temperature

- -10°C to 120°C for EPDM.
- -10°C to 82°C for NBR.
- -10°C to 110°C for Neoprene.


Material Specifications

Part	Material
Rubber	EPDM/NBR/Neoprene
Carcass	Nylon Cord Fabric
Reinforcing wire	Spring Steel Wire
Flange	Carbon Steel, Zinc Plated

Schematic

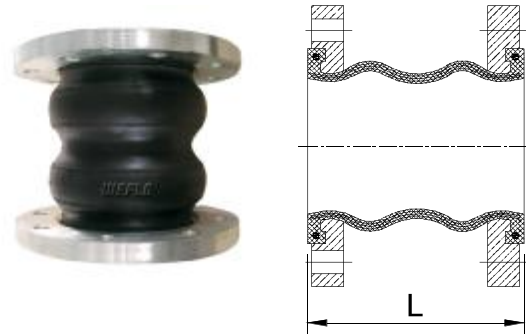


Permits Movement

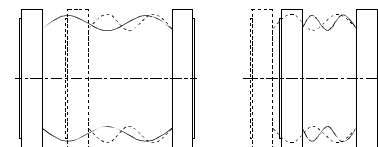

Axial Elongation

Axial Compression

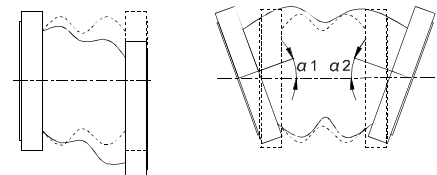

Lateral Movement

Angular Movement

Main Dimensions(mm)

Size.	L±5	Axial Compression	Axial Elongation	Lateral Movement	Angular Movement a1+a2
DN32	175	20	10	20	30°
DN40	175	20	10	20	30°
DN50	175	20	10	20	30°
DN65	175	20	10	20	30°
DN80	175	20	10	20	30°
DN100	225	30	15	25	30°
DN125	225	30	15	25	30°
DN150	225	30	15	25	30°
DN200	325	40	20	30	30°
DN250	325	40	20	30	30°
DN300	325	40	20	30	30°
DN350	350	40	20	30	30°
DN400	350	40	20	30	30°
DN450	350	45	25	30	30°
DN500	350	45	25	30	30°
DN600	350	45	25	30	30°

Notes

- Designs, materials and specifications shown are subject to change without notice due to the continuous development of our products.