

Underground Fire Hydrant

FIG. 9207

Specifications

- Meet or Exceed the Requirements of BS EN14339 Standard.
- Ductile Iron Construction.
- 2½" London Round Thread Outlet to BS 750.
- Corrosion Resistant Construction, Compliant with BS EN 1074-6 for Disinfection Products.
- Universal Drilled Inlet Flange BS EN 1092-2, BS 10 Table D/E.
- Auto-frost Drain Valve as Standard.
- Excellent Flow Characteristics.
- Multiple Outlets Configurations.
- Rated Working Pressure 16 bar.
- WRAS Approved.

Corrosion Protection

- Fusion Bonded Coating Interior and Exterior in Accordance with WIS 4-52-01 [N1] and WIS 4-52-02 [N2] .



Options

- Outlet Options : Gunmetal, Stainless Steel to BS750 Round Thread, Instantaneous (morris), Belfast, London 'V'; Thread, Internal Screwed Norwegian, Baynet (Dublin).
- Drip Plug.

Material Specifications

Part	Material	Specification
Stem Cap	Ductile Iron	EN 1563 EN-GJS-500-7
Stem	Stainless Steel	EN 10088 X20Cr13
Bonnet	Ductile Iron	EN 1563 EN-GJS-500-7
Stem Sealing	Rubber	EPDM, WRAS Approval
Stem Nut	Brass	EN 12165 CuZn39Pb1
Stopper	Ductile Iron	EN 1563 EN-GJS-500-7
Stopper Seat	Rubber	EPDM, WRAS Approval
Seat Holder	Stainless Steel	EN 10088 X5CrNi18-10
Body	Ductile Iron	EN 1563 EN-GJS-500-7
Drain Valve	Stainless Steel	EN 10088 X5CrNi18-10
Outlet	Brass	EN 1982 CuZn39Pb1
Dust Cap	Plastic	Polyethylene
Fasteners	Stainless Steel	A2-70
Body/Bonnet Gasket	Rubber	EPDM, WRAS Approval
Body/Outlet Gasket	Rubber	EPDM, WRAS Approval
Rope	Stainless Steel	EN 10088 X5CrNi18-10

Schematic

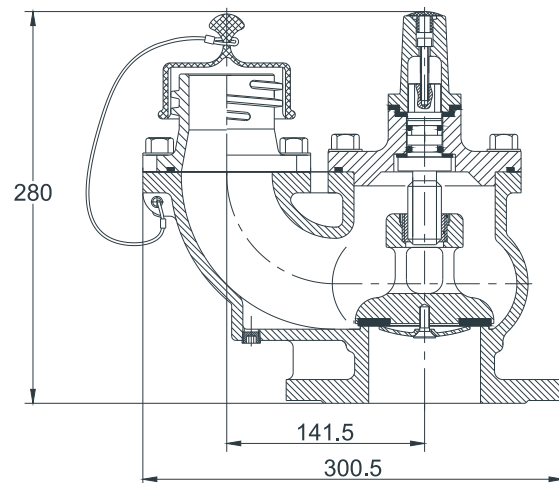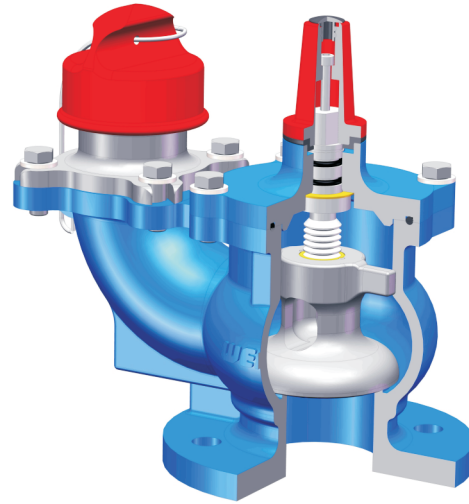

Notes

• Designs, materials and specifications shown are subject to change without notice due to the continuous development of our products.