

Adjustable Relief Valve

FIG. F1329

General Description


- F1329 bronze adjustable relief valve is rated for up to 310 psi. The adjustable relief valve allows for the required NFPA field hydrostatic testing to be accomplished without removing and/or plugging the outlet for the relief valve.

Note: Visual calibration lines on valve are used for approximate adjustment, must verify pressure setting with pressure gauge.

Technical Data

- **Maximum System Working Pressure:**
310 psi
- **Relief Valve Set Pressure Range**
175 psi to 310 psi
- **Size** 1/2", 3/4", 1"
- **FM Approved.**
- **Material Specifications**

Part Name	Material	ASTM Specification
Body	Bronze	B148 C95200
	Brass	CW602N
Sealing Gasket	Rubber	D2000 EPDM
Disc	Bronze	B148 C95200
Spring	Stainless Steel	A276 Type 304
O-Ring	Rubber	D2000 NBR
Washer	Brass	B124 C37700
O-Ring	Rubber	D2000 NBR
Piston	Stainless Steel	A276 Type 304
Adjustment Cap	Bronze	B148 C95200

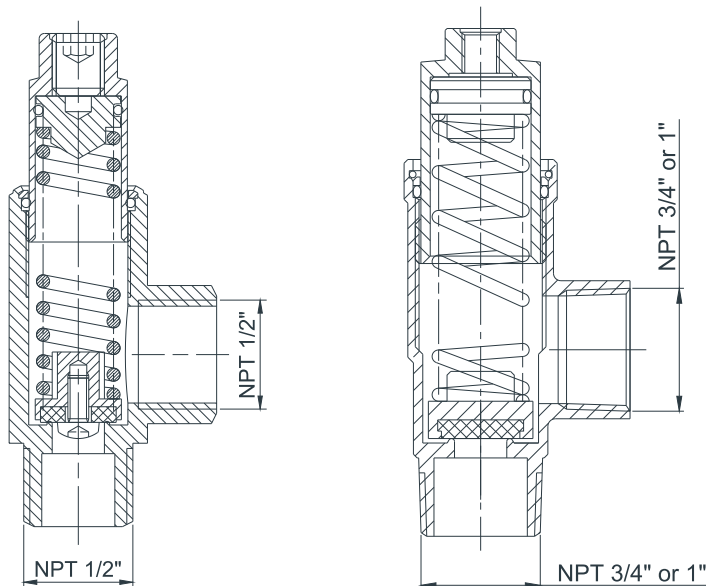

Notes

- **Designs, materials and specifications shown are subject to change without notice due to the continuous development of our products.**