

C515 NRS Resilient Seated Gate Valve 28"-30" FL x FL Ends

FIG. F1211-300

Specifications

- Meet or exceed the requirements of AWWA C515 Standard.
- Full Waterway.
- Triple O-Ring Stem Seal.
- Ductile-Iron Wedge, EPDM Encapsulated.
- Flanged to ASME B16.1 Class 125.
Other Flange Types available upon request.
- Rated Working Pressure: 300 psi.
- UL Listed.

Corrosion Protection



- Fusion Bonded Epoxy Coated Interior and Exterior to AWWA C550 Standard.

Main Dimensions (mm/inch)

Size	28"	30"
L	610/24.0	610/24.0
H	1730/68.1	1706/67.2
D	1220/48.0	1220/48.0

Material Specifications

Part	Material	ASTM Specification
Body	Ductile Iron	A536 Grade 65-45-12
Wedge	EPDM Fully Encapsulated Ductile Iron	
Wedge Nut	Bronze	B148 C95200
Stem	Stainless Steel	A276 Type 304
Gasket	Rubber EPDM	D2000
Bonnet	Ductile Iron	A536 Grade 65-45-12
Post Flange	Ductile Iron	A536 Grade 65-45-12
Sealing Gland	Stainless Steel	A276 Type 304
Y-Sealing Ring	Rubber NBR	D2000
O-Ring	Rubber NBR	D2000
Handwheel	Carbon Steel	A36

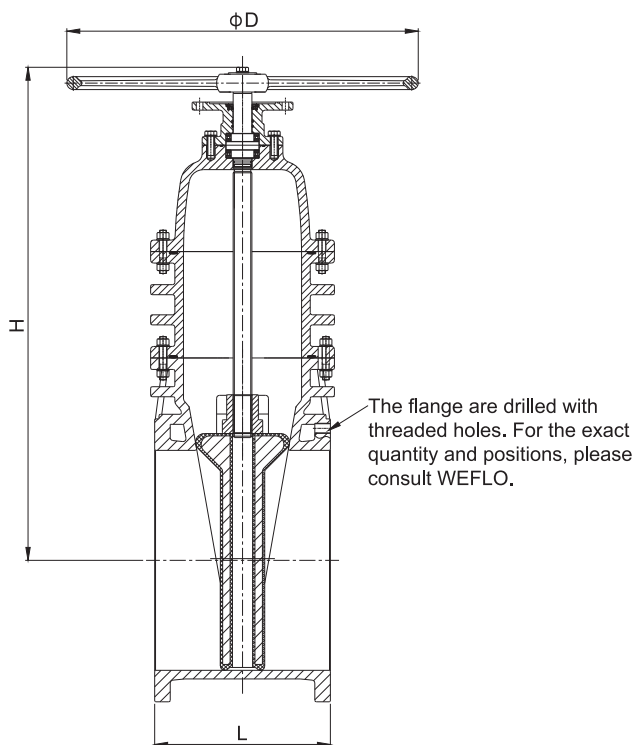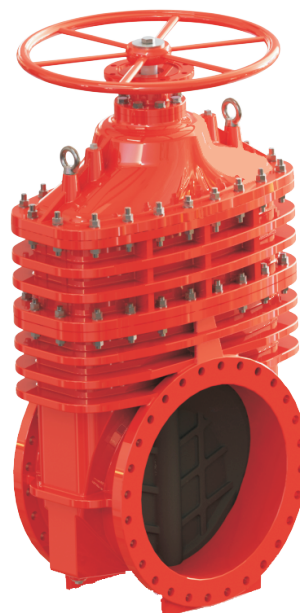

Notes

- Designs, materials and specifications shown are subject to change without notice due to the continuous development of our products.